



Home Safes



Home Safes

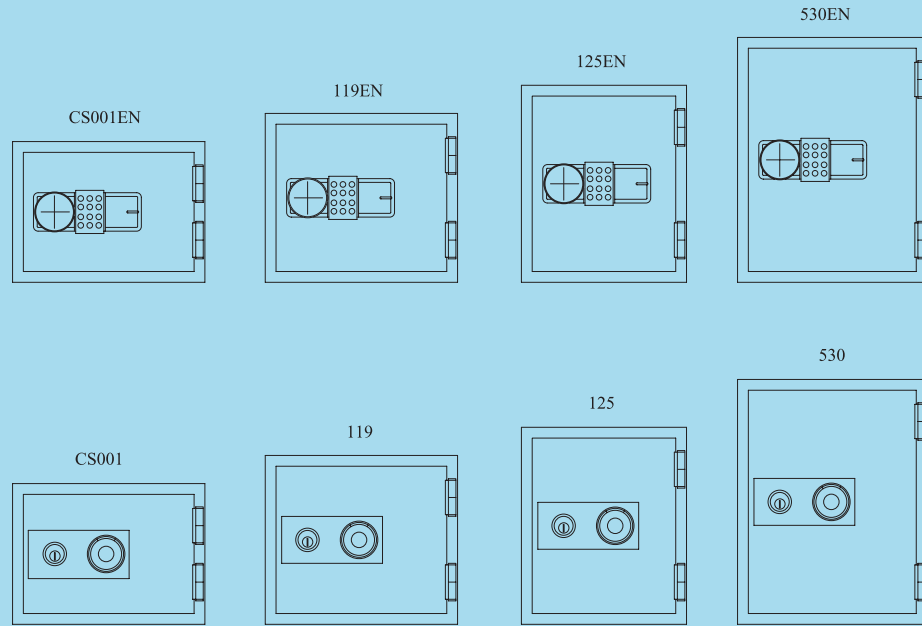

MODEL	EXTERNAL DIMENSIONS(mm)			INTERNAL DIMENSIONS(mm)			CAPACITY LITRES	MASS Kg	FIRE RATING	SHELVES	DRAWERS
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH					
CS001/CS001EN	301	410	342	220	330	225	16.3	34	1 Hr	0	0
119/119EN	353	412	363	260	320	234	19.4	39	1 Hr	0	1
125/125EN	413	352	433	320	260	304	25.3	45	1 Hr	1	1
530/530EN	515	404	440	410	300	300	36.9	62	1 Hr	1	1

BODY -

Steel lining enclosing a barrier of Styronite fire resistant material.

DOOR -

Pressed steel construction enclosing a barrier of Styronite fire resistant material. The door opens 180° on hinge assemblies that facilitate easy removal of the door for delivery or replacement.

BOLTWORK -

The door is secured to the body by moving bolts at the opening side and by fixed bolts on the hinge side. When the door is open the moving bolts remain retracted.

LOCKING -

The door is secured by a three wheel combination lock and a security key lock or dual user EDL digital lock only.

INTERNAL FITTINGS -

Adjustable shelves and drawers are supplied with each safe.

FINISH -

Leathertone painted finish.

FIRE RATING -

Fire Resistant and Impact tested and certified for 1 hour.
60P, NT Fire 017 – Swedish National Testing & Research Institute (SP)
KSG 4500 & P-S1TS – Korean Standards Association (KSA)

In line with our policy to provide the best in security, we reserve the right to incorporate any improvements or alter any part of the specification without prior notice.

Distributed by:

Branches

NSW Tel: (02) 9906 5055
VIC Tel: (03) 9644 8200
QLD Tel: (07) 3841 4400

Fax: (02) 9902 4905
Fax: (03) 9644 8220
Fax: (07) 3841 4411

Email: apisales@apisec.com
Website: www.apisec.com

ACN: 001 597 584

