



Filing Cabinets



Filing Cabinets

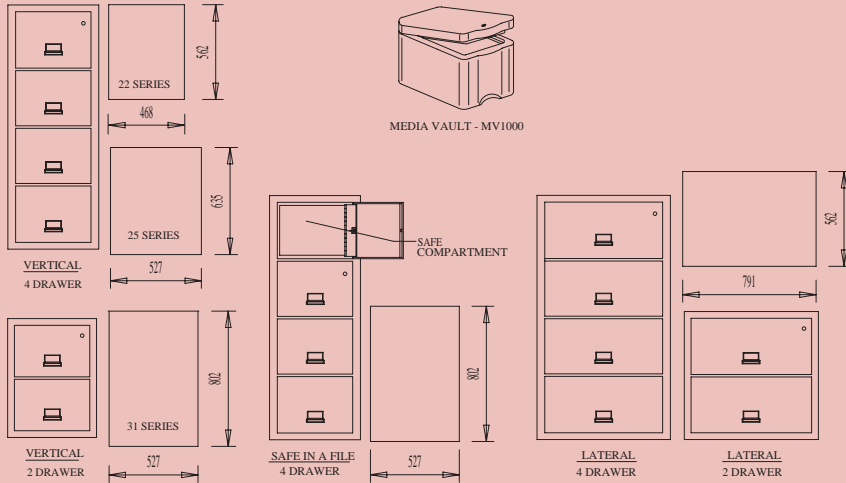

MODEL	EXTERNAL DIMENSIONS(mm)			INTERNAL DIMENSIONS(mm) (EACH DRAWER)			MASS
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	Kg
22 SERIES - 2 DRAWER	705	468	562	273	329	384	110
22 SERIES - 4 DRAWER	1340	468	562	273	329	384	218
25 SERIES - 2 DRAWER	705	527	635	264	387	502	155
25 SERIES - 4 DRAWER	1340	527	635	264	387	502	270
31 SERIES - 2 DRAWER	705	527	802	264	387	660	185
31 SERIES - 4 DRAWER	1340	527	802	264	387	660	326
LATERALS - 2 DRAWER	705	791	562	273	640	384	198
LATERALS - 4 DRAWER	1340	791	562	273	640	384	348
SAFE IN A FILE 4 DRAWER	1340	527	802	264	387	660	355
MEDIA VAULT - MV1000	267	295	444	149	159	225	34



INSULATION -

Insulated with reinforced gypsum that is low temperature oven dried to reduce free moisture to less than half a percent. An insulated bulkhead between each drawer provides additional protection.

LOCKING -

The top control drawer is fitted with a Medeco high security UL listed key lock, which is resistant to picking and drilling. The 22 Series is fitted with a four pin key lock. The control drawer can be used to lock all drawers or any lower drawer can be locked individually by activating the by-pass catch on the side of the drawer.

FINISH -

Electrostatic powder coating up to 3 times thicker than conventional painted files is applied to the body and drawers. Standard colour for all Models, excluding 22 Series is Platinum. The 22 Series File standard colour is Parchment.

INTERNAL FITTINGS -

Each drawer is built with high sides to accommodate hanging file folders so no additional frames are required.

MEDIA VAULT -

The compact stand alone Media Vault is designed to protect your electronic records from heat, humidity, dust and magnetic fields. It's the only media safe of its size to carry the Underwriter's Laboratories Class 125 1 hour rating for insulated record protection equipment.

FIRE RATING -

Independently tested to the most stringent International standards. All files will survive a loaded fall of 10 metres and maintain fire protection. Steel lattice reinforcement offers this impact protection on all six sides.

UL Class 350 (USA) – 1 hour fire endurance and impact test.

VDMA S60P (European standard) – 1 hour fire endurance and impact test.

WARRANTY – If a mechanical or operable part of a FireKing Filing Cabinet malfunctions or breaks down during normal use we will, at our option replace such part free for as long as the original purchaser owns the product. Free Replacement Guarantee. If a FireKing file sustains any damage while protecting records from a fire we will replace it free of charge. Replacement of parts or cabinets excludes labour, delivery and installation charges.

In line with our policy to provide the best in security, we reserve the right to incorporate any improvements or alter any part of the specification without prior notice.

Distributed by:

Branches

NSW Tel: (02) 9906 5055
VIC Tel: (03) 9644 8200
QLD Tel: (07) 3841 4400

Fax: (02) 9902 4905
Fax: (03) 9644 8220
Fax: (07) 3841 4411

Email: apisales@apisec.com
Website: www.apisec.com

ACN: 001 597 584

