




**LORD**  
**SAFE C<sup>o</sup>**

# Nugget Series

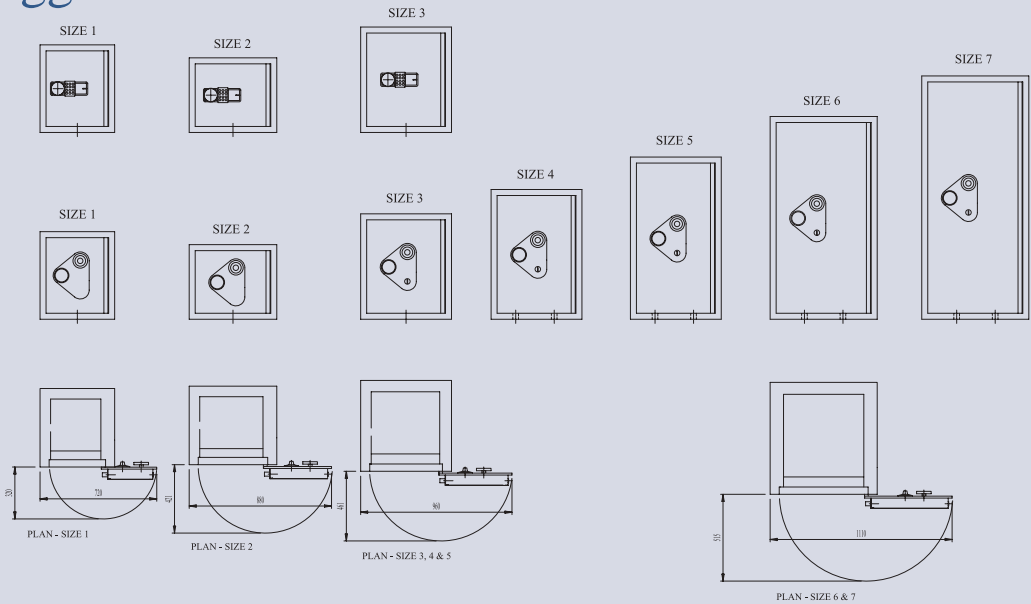

# Nugget Series



MODEL	EXTERNAL DIMENSIONS(mm)			INTERNAL DIMENSIONS(mm)			CAPACITY LITRES	MASS Kg	LOCKING POINTS	SHELVES	FLOOR LOADING
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH					
1	540	460	480	407	310	320	40	220	4	1	9.8
2	460	540	480	327	390	320	40	220	4	1	8.3
3	650	580	560	506	421	383	80	365	4	2	10.9
4	800	580	560	656	421	383	100	430	6	2	12.8
5	1000	580	560	856	421	383	135	515	6	2	15.3
6	1250	660	690	1106	495	510	280	795	8	3	17.0
7	1500	660	690	1356	495	510	340	930	10	3	19.9

## BODY -

Thickness Sizes 1 and 2 is 62mm and Sizes 3 to 7 is 72mm, with high strength refractory material securely anchored to the inner lining.

## DOOR -

Thickness of 80mm. A 12mm thick barrier plate is recessed into the body for maximum protection. *Nugget "Plus" 12mm thick door is oxyacetylene and drill resistant.*

## BOLTWORK -

A two-way boltwork system secures the door to the body with 25mm diameter bolts.

## LOCKING -

All sizes are fitted with three wheel combination lock and a high security key lock. Sizes 1, 2 and 3 are available with a three wheel combination lock only or digital lock only. Optional extra: Key lock Size 1 & 2, digital lock Sizes 4 to 7.

## SECONDARY LOCKING SYSTEM -

Sizes 1 & 2 are fitted with a spring-loaded relocker attached to the back of the lock. Sizes 3 to 7 are fitted with a glass activated relocker system.

## ANCHORING -

Safe can be bolted to the floor via the bolt down hole in the base of the safe.

## DEPOSIT DRAWER OR SLOT -

Can be fitted to the top of the safe during manufacture.

## INTERNAL FITTINGS -

Adjustable shelves are supplied with each safe. Cupboards and drawers are available.

## FINISH -

Colour for Sizes 1 to 3 Cloud Grey, Sizes 4 to 7 Gunmetal Grey. Stainless steel fascia and hinge cover compliment the contemporary design and finish.

*In line with our policy to provide the best in security, we reserve the right to incorporate any improvements or alter any part of the specification without prior notice.*

Distributed by:

## Branches

NSW Tel: (02) 9906 5055  
VIC Tel: (03) 9644 8200  
QLD Tel: (07) 3841 4400

Fax: (02) 9902 4905  
Fax: (03) 9644 8220  
Fax: (07) 3841 4411

Email: [apisales@apisec.com](mailto:apisales@apisec.com)  
Website: [www.apisec.com](http://www.apisec.com)

ACN: 001 597 584



Quality Endorsed Company

ISO 9002: 1994  
License No. QMS 103